



FLIR TAU 2


Longwave Infrared
Thermal Camera

FLIR® Tau® 2 thermal imaging cameras offer an unmatched set of features, making them well-suited for demanding applications, such as unmanned vehicles (UVs), thermal weapon sights, and handheld imagers. Improved electronics now give Tau 2 even more capabilities, including radiometry, increased sensitivity, a 60Hz frame rate, and powerful image processing modes that dramatically improve detail and contrast.

IMPROVED IMAGE PROCESSING

For clearer imagery, edge sharpening, and contrast

- Second generation Digital Detail Enhancement (DDE)
- Active Contrast Enhancement (ACE)
- Smart Scene Optimization (SSO)
- Information Based HEQ (IBHEQ) automatically adjusts AGC
- Silent Shutterless NUC for continuous image improvement

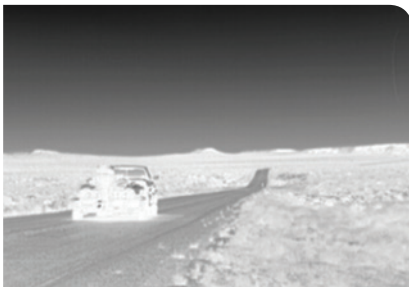

Tau image Without ACE



Tau image with new ACE feature

ACCURATE TEMPERATURE MEASUREMENT

Supports radiometry, analytics and telemetry

- TLinear output places temperature data in each pixel
- Adjustable isotherm thresholds colorize temperatures of interest
- Rugged and reliable in all terrain

COMMON FEATURES ACROSS MODELS

Fosters improved OEM integration

- 640, 336 and 324 resolutions
- Multiple lens and FOV options
- 60Hz or 30mK frame rates
- Mechanical / electrical compatibility
- FLIR brand and support

Imaging Specifications

System Overview	
System Type	Uncooled LWIR Thermal Imager
Tau 2 640	640 × 512 VOx Microbolometer
Tau 2 336	336 × 256 VOx Microbolometer
Tau 2 324	324 × 256 VOx Microbolometer
Pixel Size	17 μm (Tau 2 640, 336); 25 μm (Tau 2 324)
Spectral Band	7.5 - 13.5 μm
Performance	<50 mK @ f/1.0
Outputs	
Analog Video	Field-switchable between NTSC and PAL
Tau 2 640	30/60Hz (NTSC); 25Hz/60Hz (PAL); <9Hz option for export (factory set)
Tau 2 336, 324	30/60 Hz (NTSC); 25/50 Hz (PAL) ; <9Hz option for export (factory set)
Digital Video	8- or 14-bit serial LVDS; 8- or 14-bit parallel CMOS; 8-bit BT.656
Operation & Control	
Image Control	Invert, revert, continuous digital zoom, dynamic zoom & pan, digital zoom presets, polarity, false color or monochrome, isotherms, AGC, second generation digital detail enhancement (DDE), image optimization (BPR, NUC & AGC'd video), Active Contrast Enhancement (ACE, Information Based Histogram Equalization (IBHEQ), Smart Scene Optimization (SSO), settable splash screens
Camera Control	Manual via SDK & GUI, dynamic range switching (Tau 2 324 only)
Signal Interface	Camera Link (Expansion Bus Accessory Module), discrete I/O controls available, RS-232 compatible (57,600 & 921,600 baud), external sync input/output, power reduction switch (removes analog video)
FFC Duration	<0.5 sec
Physical Attributes	
Size	1.75" × 1.75" × 1.75" (less lens)
Mounting Interface	6 attach points in lens mount, M2 x 0.4 on 3 sides, 2 per side (sealable bulkhead mounting feature on lens barrel [M29 × 1.0], WFOV only)
Power	
Input Voltage	4.0 – 6.0 VDC
Primary Electrical Connector	50-pin Hirose
Power Dissipation	~ 1.0 W (Tau 2 324 & 336); <1.2 W (Tau 2 640); <1.3W (Tau 2 640/60Hz)
Time to Image	<5 seconds (Tau 2 640); <4 seconds (Tau 2 336 and 324)
Environmental	
Operating Temperature Range	-40° C to +80° C external temp
Storage Temperature Range	-55° C to +95° C external temp
Scene Temp Range	High gain: -40°C to +160°; Low gain: -40°C to +550°
Shock	200 g shock pulse with 11 msec sawtooth
Temperature Shock	5°/min
Vibration	4.3 g 3 axes, 8 hours each
Humidity	5 - 95% non-condensing
Operational Altitude	+40,000 feet
ROHS, REACH, and WEEE	Compliant

Applications:

Unmanned Airborne Vehicles
Handheld imagers
Security Cameras
Maritime cameras
Thermal weapon sights



For FLIR Sales and Service contact us at:

Phone: 1-888-919-2263 | Outside the U.S.: +1-845-343-4077 | Fax: +1-845-343-4299
 Address: P.O. Box 4242 Middletown, New York 10941 USA

CORPORATE HEADQUARTERS
 FLIR Systems, Inc.
 27700 SW Parkway Ave.
 Wilsonville, OR 97070
 PH: +1 877.773.3547

SANTA BARBARA
 FLIR Systems, Inc.
 6769 Hollister Ave.
 Goleta, CA 93117
 PH: +1 805.690.6602

CHINA
 FLIR Systems Co., Ltd
 Room 502, West Wing, Hanwei Building
 No. 7 Guanghua Ave.
 Chaoyang District, Beijing 100004, China
 Phone: +86 10-59797755

EUROPE
 FLIR Systems, Inc.
 Luxemburgstraat 2
 2321 Meer
 Belgium
 PH: +32 (0) 3665 5100

www.flir.com
 NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice.
 ©2016 FLIR Systems, Inc. All rights reserved. 09/22/2016

16-0423-OEM-TAU-2